

Audéo YES

Audéo YES V

Technical Data



External receiver (CRT) instrument with size 312 battery and VoiceZoom (for fitting range, product details and available options, please see the "Audéo YES Product Information Overview" or visit www.phonak.com/professional)

Audéo YES instruments can be fitted with either a standard or power receiver. Unless otherwise specified, all data obtained are measured in a closed configuration with a coupling disc onto a HA-1 coupler (ANSI-S3.7-1995) or an occluded ear simulator (EN


60711, coupling arrangement according to fig. 4 in the test standard), and in the iPFM measurement settings.

Note: Measurements with pure tones of a digital hearing instrument can result in a wavy frequency response. This is an artifact resulting from the use of a narrowband input signal and does not reflect the actual performance with naturally occurring broadband input signals.


Ear simulator data with xS* receiver

*Standard EN / IEC 60118 and IEC 60711

Output sound pressure level

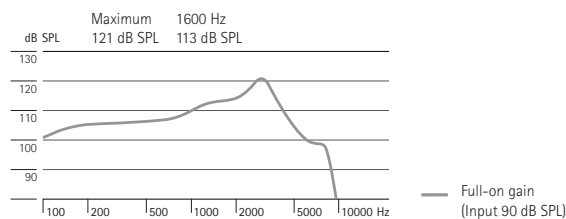

Acoustic gain

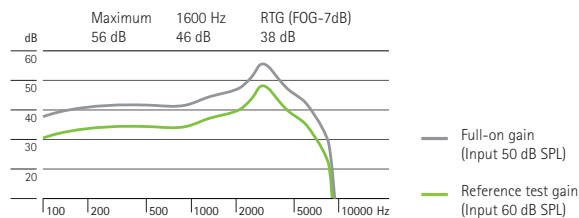


Frequency range	<100 Hz – 8300 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.0%	1.0%	0.5%
Battery current	Quiescent	Working	
	1.0 mA	1.1 mA	
Equivalent input noise level	19 dB SPL		


Ear simulator data with xP* receiver

*Power EN / IEC 60118 and IEC 60711

Output sound pressure level

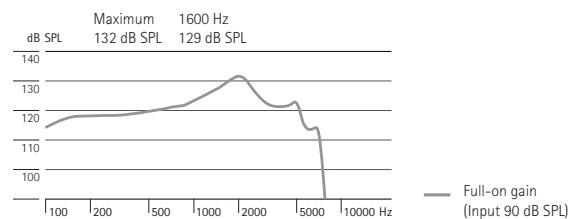

Acoustic gain

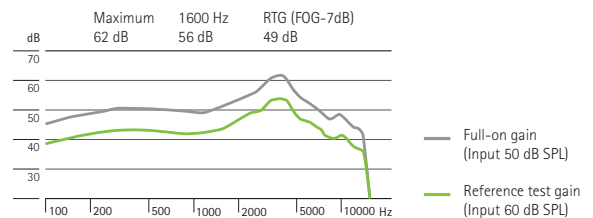


Frequency range	<100 Hz – 7000 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	2.0%	2.0%	1.0%
Battery current	Quiescent	Working	
	1.0 mA	1.1 mA	
Equivalent input noise level	19 dB SPL		

2cm³ coupler data with xS* receiver

*Standard ANSI S3.22-2003


Output sound pressure level

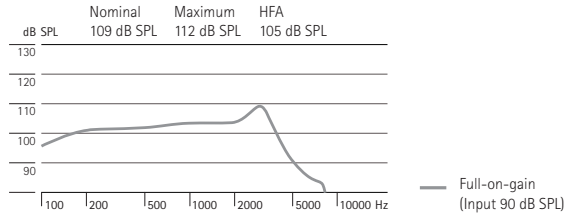


2cm³ coupler data with xP* receiver

*Power ANSI S3.22-2003


Output sound pressure level

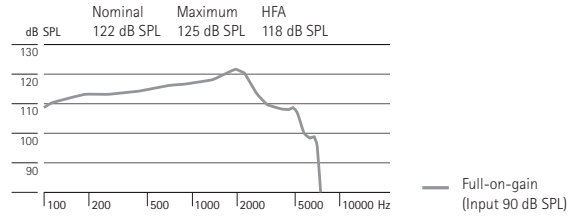

Acoustic gain

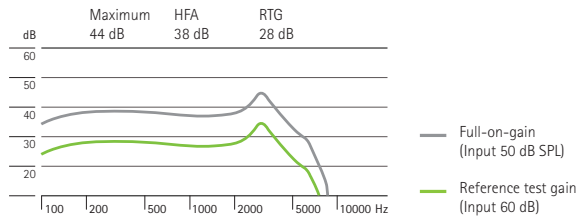


Acoustic gain

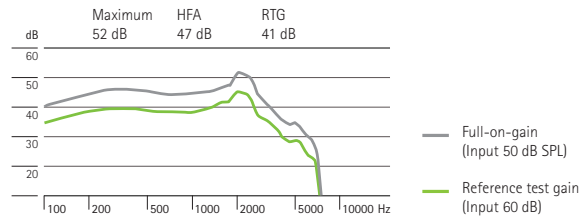

Frequency range	<100 Hz – 7900 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.0%	0.5%	0.5%
Battery current	Quiescent	Working	
	1.0 mA	1.1 mA	
Equivalent input noise level	19 dB SPL		

Frequency range	<100 Hz – 7900 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.5%	1.0%	0.5%
Battery current	Quiescent	Working	
	1.0 mA	1.2 mA	
Equivalent input noise level	19 dB SPL		

Input / Output characteristics

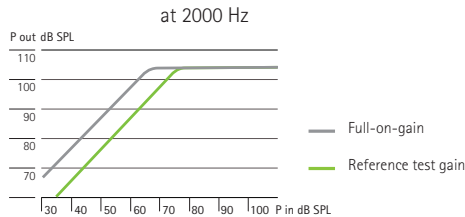

Input / Output characteristics

