



Technical Data

Phonak Ambra

Phonak Ambra microP


Compact power BTE, battery size 13 (for fitting range, product details and available options, please see Product Information or visit www.phonakpro.com).

Unless otherwise specified, all data obtained are measured with the hook type HE10 680 and Phonak Target measurement settings.


Ear simulator data

EN / IEC 60118 and IEC 60711

Output sound pressure level

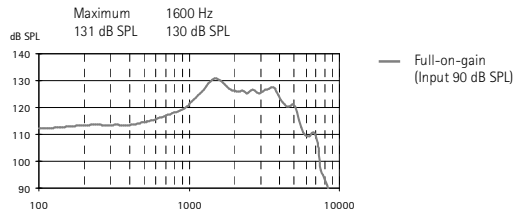


Acoustic gain

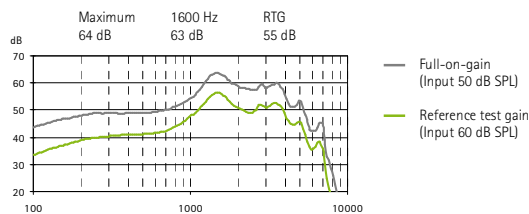

Frequency range	200 Hz - 5400 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	3%	3%	1%
Battery current	Quiescent	Working	
	1.1 mA	1.3 mA	
Equivalent input noise level	19 dB SPL		

Induction coil sensitivity

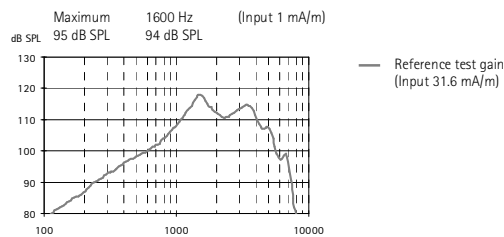

Dynamic data


Compression	Attack time	Recovery time
	1 ms	20 ms

Note: Using pure tone measurements with a digital hearing instrument can result in a wavy frequency response. This is an artifact resulting from the use of a narrowband input signal and does not effect the actual performance with naturally occurring broadband input signals.


2cm³ coupler data

ANSI S3.22-2003

Output sound pressure level

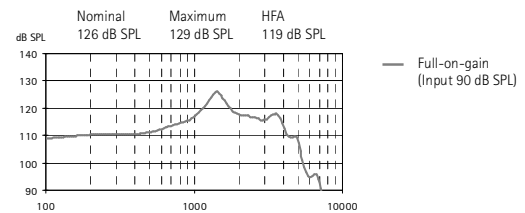


Acoustic gain

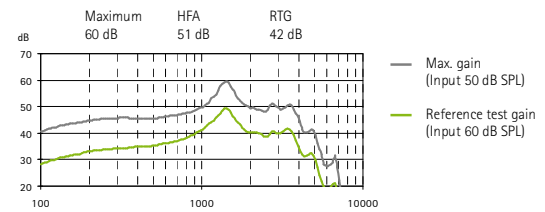

Frequency range	<100 Hz - 5500 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	2%	2%	1%
Equivalent input noise level	19 dB SPL		


Induction coil sensitivity

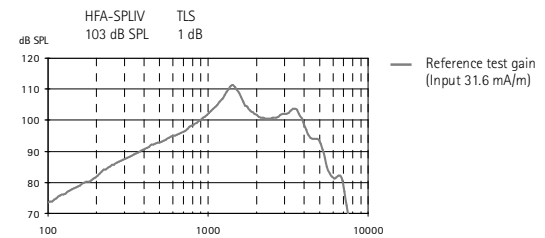

Dynamic data

Compression	Attack time	Recovery time
	1 ms	20 ms

Input / Output characteristics at 2000 Hz

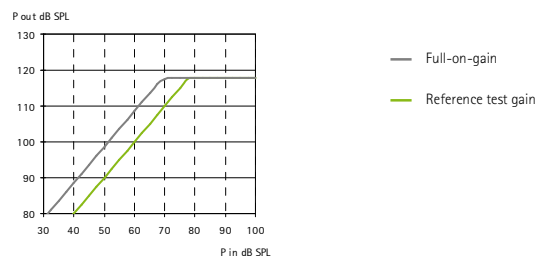

PHONAK