



Technical Data

Phonak Naída Link

Phonak Naída Link RIC (xSP+)


WaterResistant Receiver-In-Canal (RIC) instrument with size 13 battery (for fitting range, product details and available options, please see the Product Information or visit www.phonakpro.com)

Phonak Naída Q-RIC instruments can be fitted with a SuperPower plus (xSP+), power (xP) or standard (xS) receiver. The SuperPower plus (xSP+) xReceiver is for moderate to profound hearing loss.


Ear simulator data

IEC 60118-0: 1994

Output sound pressure level

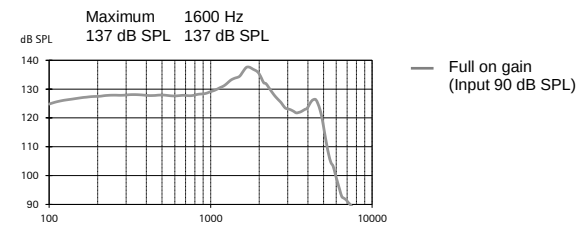


Acoustic gain

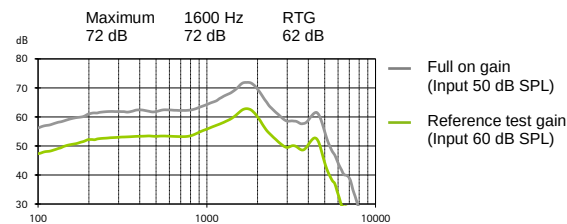

Frequency range	100 Hz - 4800 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	2%	1.5%	1%
Battery current	Quiescent	Working	
	1.1 mA	1.4 mA	
Equivalent input noise level	19 dB SPL		

Induction coil sensitivity

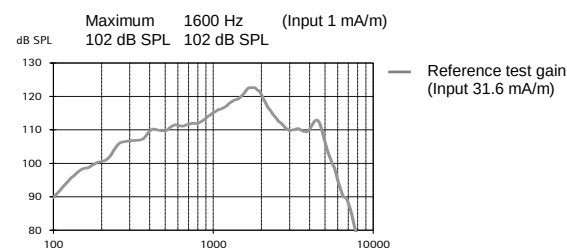


Using pure tone measurements with a digital hearing instrument can result in a wavy frequency response. This is an artifact resulting from the use of a narrowband input signal and does not affect the actual performance with naturally occurring broadband input signals.

2cm³ coupler data


ANSI/ASA S3.22-2014

IEC 60118-0: 2015

Output sound pressure level

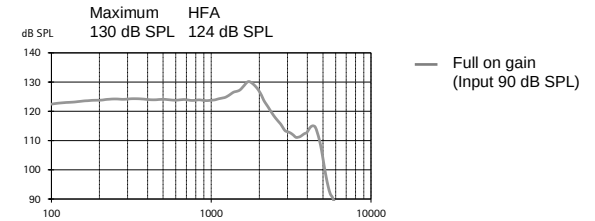


Acoustic gain

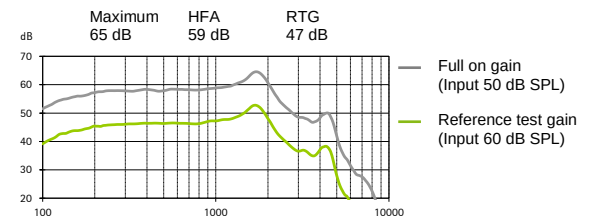

Frequency range	<100 Hz - 5100 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1%	1.5%	0.5%
Battery current	1.4mA		
Equivalent input noise level	19 dB SPL		

Induction coil sensitivity

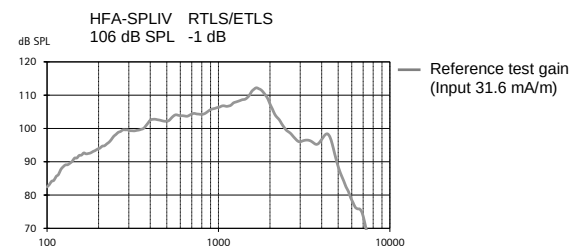

PHONAK



Technical Data

Phonak Naída Link


Phonak Naída Link RIC (xP)

The Power xReceiver (xP) is for mild to severe hearing loss.


Ear simulator data

EN / IEC 60118-0: 1994

Output sound pressure level

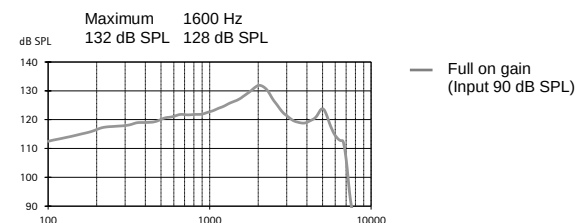


Acoustic gain

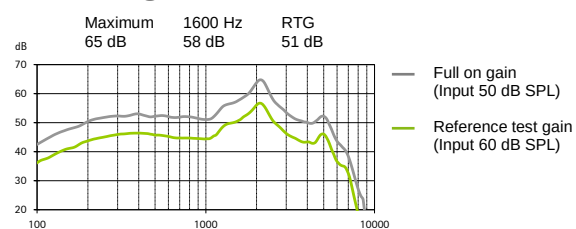

Frequency range	100 Hz - 6100 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.5%	1.5%	1%
Battery current	Quiescent	Working	
	1.1 mA	1.2 mA	
Equivalent input noise level	19 dB SPL		

Induction coil sensitivity

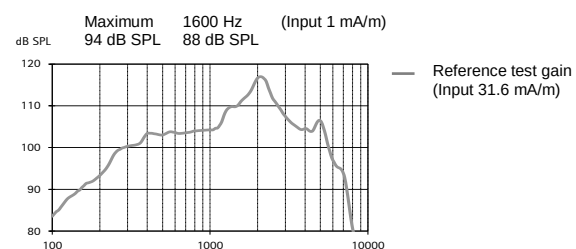


2cm³ coupler data


ANSI/ASA S3.22-2014

IEC 60118-0: 2015

Output sound pressure level

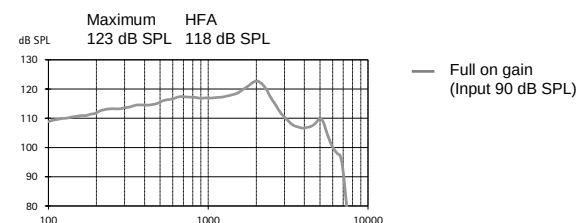


Acoustic gain

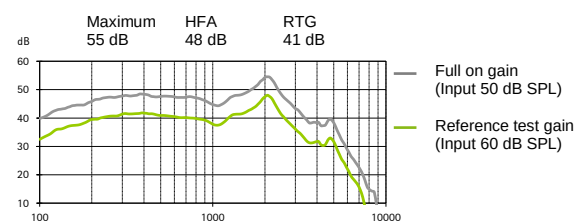

Frequency range	<100 Hz - 6200 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1%	1%	1%
Battery current	1.3 mA		
Equivalent input noise level	19 dB SPL		

Induction coil sensitivity

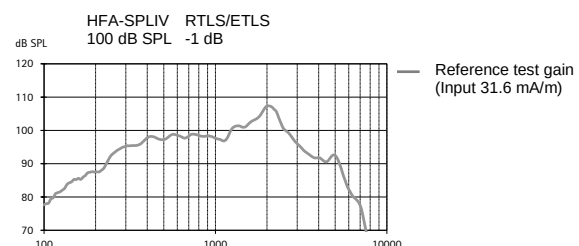

PHONAK



Technical Data

Phonak Naída Link


Phonak Naída Link RIC (xS)

The standard xReceiver (xS) is for mild to moderately-severe hearing loss.


Ear simulator data

IEC 60118-0: 1994

Output sound pressure level

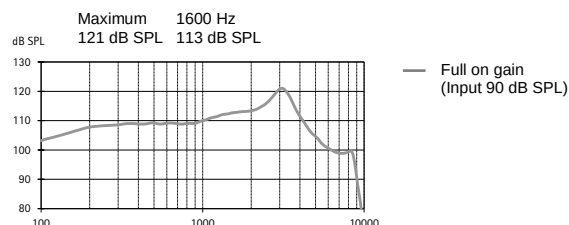


Acoustic gain

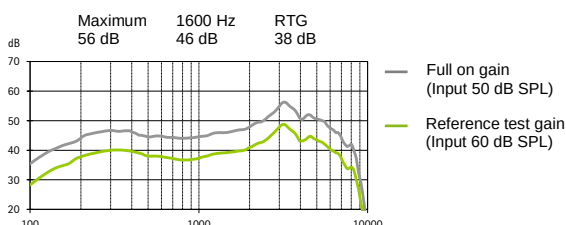

Frequency range	<100 Hz - 9000 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.5%	2%	2.5%
Battery current	Quiescent	Working	
	1.1 mA	1.2 mA	
Equivalent input noise level	19 dB SPL		

Induction coil sensitivity

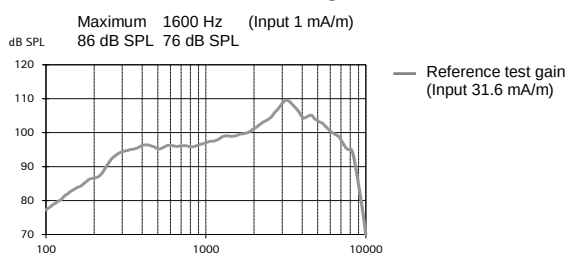


2cm³ coupler data


ANSI/ASA S3.22-2014

IEC 60118-0: 2015

Output sound pressure level

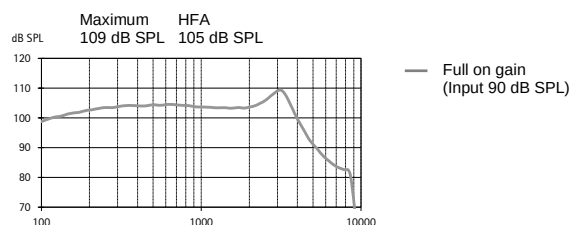


Acoustic gain

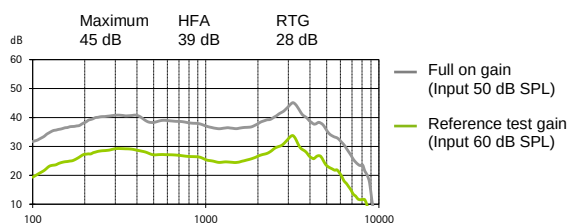

Frequency range	<100 Hz - 8900 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.5%	2%	2%
Battery current	1.2mA		
Equivalent input noise level	19 dB SPL		

Induction coil sensitivity

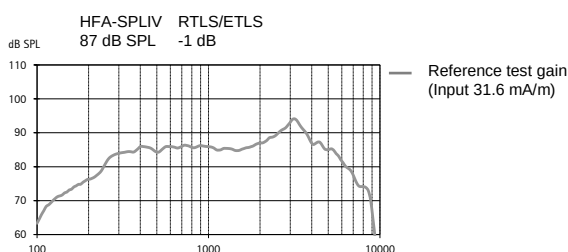

PHONAK