




## Phonak Audéo L-R (L90/L70/L50/L30/L20/Trial)


### S Receiver 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014  
IEC 60118-0 : 2015

#### Output sound pressure level

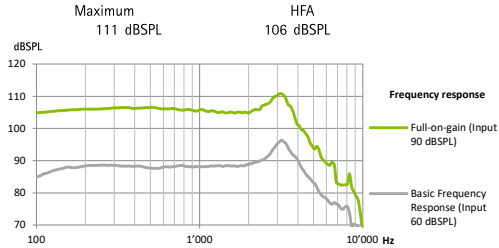

#### Acoustic gain

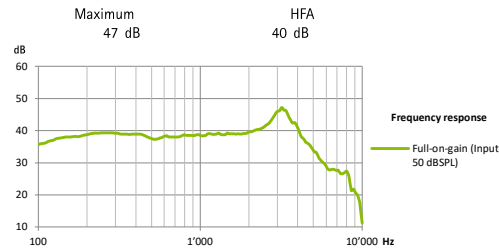


Frequency range	<100 Hz - >8000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.5%	2.0%	2.0%	1.0%
Expected operating time*	18	h		
Equivalent input noise level	19 dB SPL			


### M Receiver 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014  
IEC 60118-0 : 2015

#### Output sound pressure level

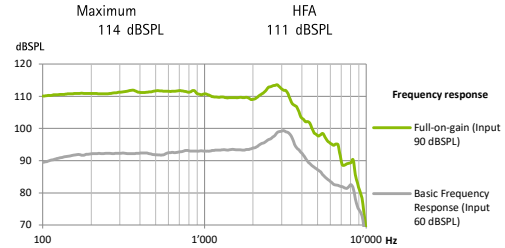

#### Acoustic gain

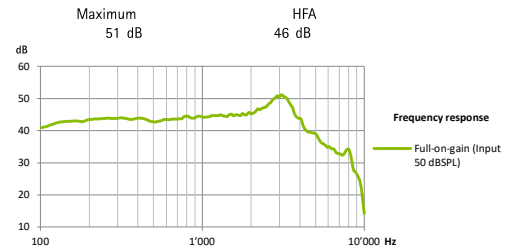

Frequency range	<100 Hz - >8000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.5%	2.0%	2.0%	1.0%
Expected operating time*	18	h		
Equivalent input noise level	19 dB SPL			

#### General test information

- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- All data obtained are measured with Phonak Target measurement settings

#### Warnings

- ⚠ This hearing instrument has an output sound pressure level that can exceed 132 dB SPL. Special care should be taken when fitting this instrument as there is a risk of impairing the residual hearing of the user.
- ⚠ Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted. Such changes may damage the ear or the hearing aid.

\* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.



Sonova AG · Laubisrütistrasse 28  
CH-8712 Stäfa · Switzerland  
www.phonak.com

A Sonova brand




## Phonak Audéo L-R (L90/L70/L50/L30/L20/Trial)

### MAV Receiver


#### 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014  
IEC 60118-0 : 2015

#### Output sound pressure level

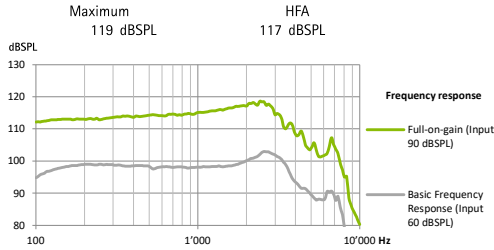

#### Acoustic gain

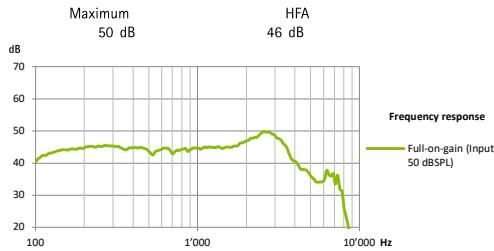


Frequency range	<100 Hz - >8000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.5%	1.5%	1.0%	1.0%
Expected operating time*	18	h		
Equivalent input noise level	19	dB SPL		

### P Receiver


#### 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014  
IEC 60118-0 : 2015

#### Output sound pressure level

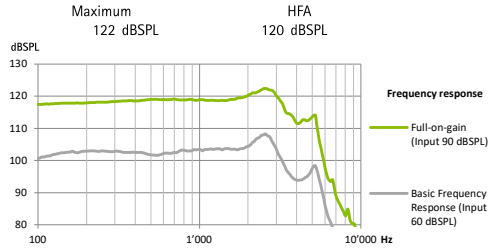

#### Acoustic gain

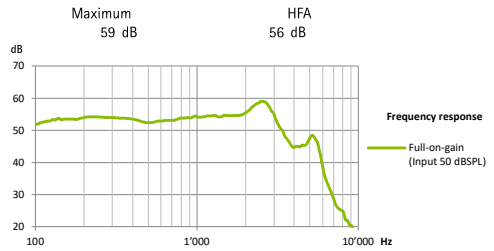

Frequency range	<100 Hz - 6300 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.5%	1.0%	1.0%
Expected operating time*	18	h		
Equivalent input noise level	19	dB SPL		

\* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.



Sonova AG · Laubisrütistrasse 28  
CH-8712 Stäfa · Switzerland  
www.phonak.com

A Sonova brand

**PHONAK**  
life is on


## Phonak Audéo L-R (L90/L70/L50/L30/L20/Trial)

### UP Receiver


#### 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014  
IEC 60118-0 : 2015

#### Output sound pressure level

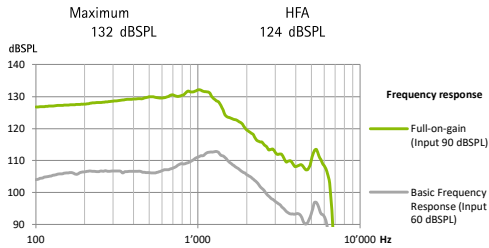

#### Acoustic gain

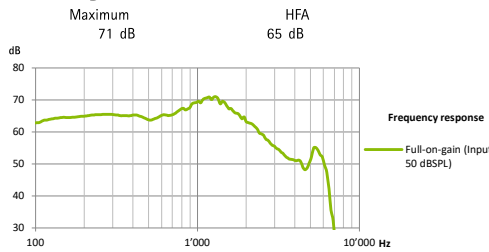

Frequency range	<100 Hz - 6100 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.5%	1.5%	1.0%	1.0%
Expected operating time*	18	h		
Equivalent input noise level	19	dB SPL		

\* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.