

## Versáta CIC / MC P Petite


### Technical Data

#### Ear simulator data

EN / IEC 60118 and IEC 60711




#### Output sound pressure level

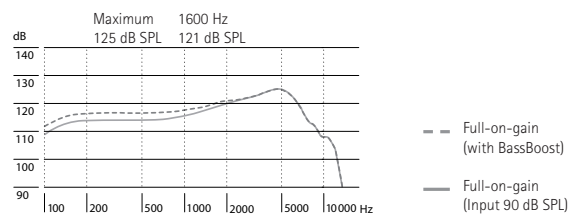

CIC/mini canal power, battery size 10 (for fitting range, product details and available options, please see "Versáta Product Information" or visit [www.phonak.com](http://www.phonak.com)).

Versáta Petite devices do not have wireless functionality but support remote controls like KeyPilot2 and WatchPilot2. Unless otherwise specified, all data obtained are measured with 5 mm tubing and iPFG measurement settings.

#### Acoustic gain

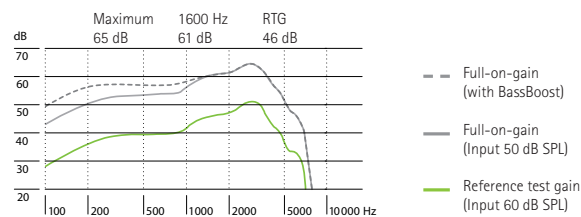

Note: Measurements with pure tones of a digital hearing instrument can result in a wavy frequency response. This is an artifact resulting from the use of a narrowband input signal and does not reflect the actual performance with naturally occurring broadband input signals.

Frequency range	140 Hz – 6600 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.9%	3.2%	1.7%
Battery current	Quiescent	Working	
	1.0 mA	1.1 mA	
Equivalent input noise level	19 dB SPL		


#### Dynamic data

Compression	Attack time	Recovery time
	1 ms	50 ms


## 2cm<sup>3</sup> coupler data

ANSI S3.22-2003


### Output sound pressure level

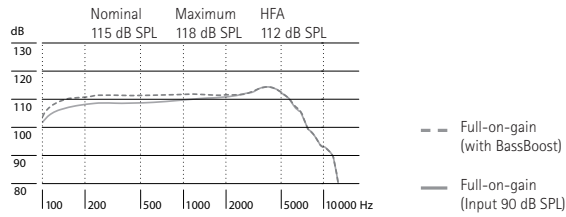

### Input / Output characteristics at 2000 Hz

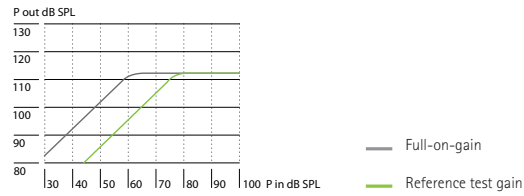

### Acoustic gain

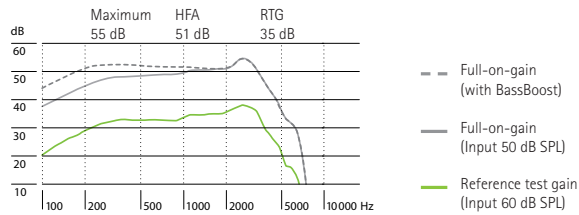

Frequency range	<100 Hz – 6200 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	0.9%	1.2%	0.3%
Equivalent input noise level	19 dB SPL		

### Dynamic data

Compression	Attack time	Recovery time
	1 ms	50 ms