



Technical Data

Phonak Audéo B

Phonak Audéo B-10 B90 (xS)


Receiver-In-Canal (RIC) instrument with size 10 battery (for fitting range, product details and available options, please see the Product Information or visit www.phonakpro.com).

Phonak Audéo B-10 instruments can be fitted with a Standard (xS) or Power (xP) receiver.


Ear simulator data

IEC 60118-0: 1994

Output sound pressure level

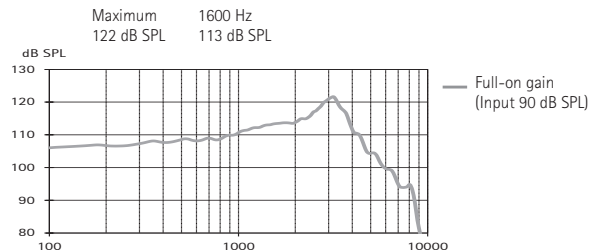

Acoustic gain

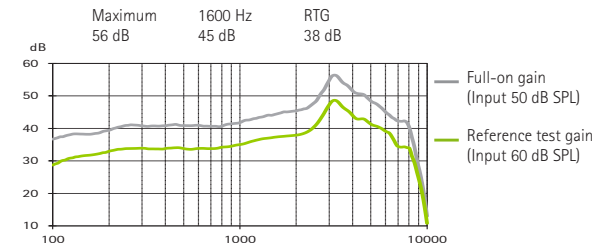

Frequency range	<100 Hz - 9200 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.5%	2%	2.5%
Battery current	Quiescent	Working	
	1.1 mA	1.2 mA	
Equivalent input noise level	19 dB SPL		


Using pure tone measurements with a digital hearing instrument can result in a wavy frequency response. This is an artifact resulting from the use of a narrowband input signal and does not affect the actual performance with naturally occurring broadband input signals.

2cm³ coupler data


ANSI/ASA S3.22-2014

IEC 60118-0: 2015


Output sound pressure level

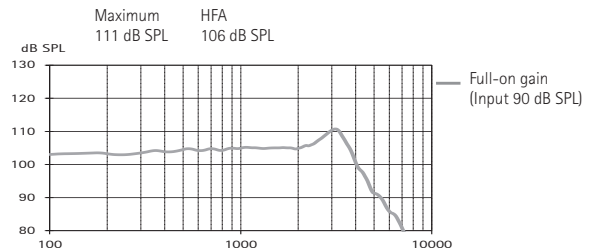

Acoustic gain

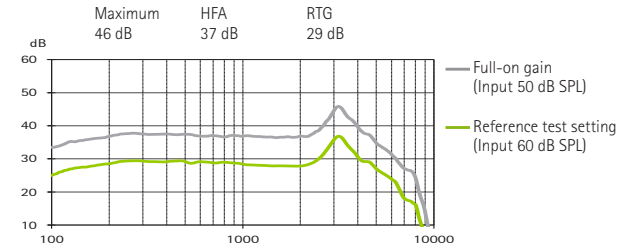

Frequency range	<100 Hz - 8800 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.5%	2%	2%
Battery current	1.2 mA		
Equivalent input noise level	19 dB SPL		



Mild to moderately-severe hearing loss.




Phonak Audéo B-10 B90 (xP)


Ear simulator data

IEC 60118-0: 1994

Output sound pressure level

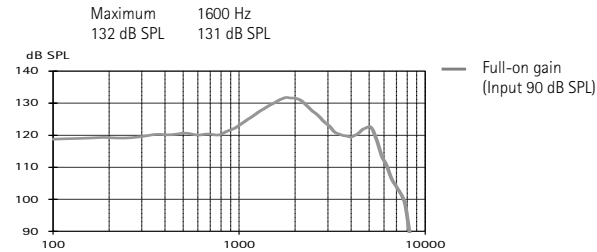

Acoustic gain

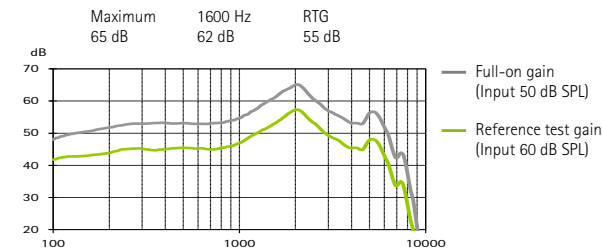


Frequency range	<100 Hz - 6400 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.5%	1.5%	1.5%
Battery current	Quiescent	Working	
	1.1 mA	1.2 mA	
Equivalent input noise level	19 dB SPL		

2cm³ coupler data


ANSI/ASA S3.22-2014

IEC 60118-0: 2015


Output sound pressure level

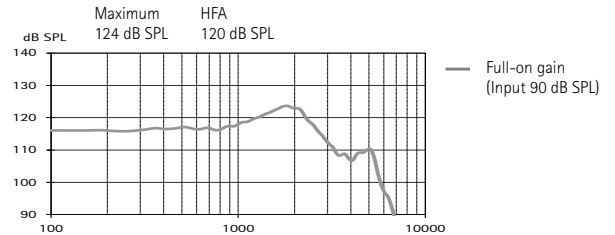

Acoustic gain

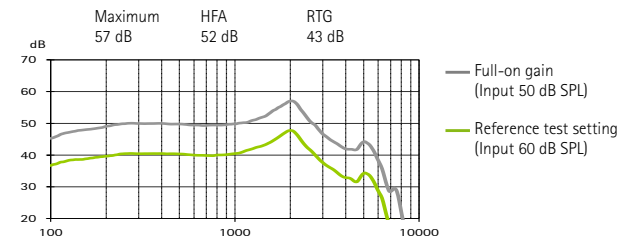

Frequency range	<100 Hz - 6600 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1%	1%	1%
Battery current	1.2 mA		
Equivalent input noise level	19 dB SPL		



Mild to severe hearing loss.