



Phonak Dalia 10 Petite (M)


Small ITE, battery size 10A. For fitting range, product details and available options, please see **Product Information** or visit www.phonakpro.com.

Petite devices do not have wireless functionality. Unless otherwise specified, all data obtained are measured with 5 mm tubing and Phonak Target measurement settings.


Ear simulator data

EN / IEC 60118 and IEC 60711

Output sound pressure level

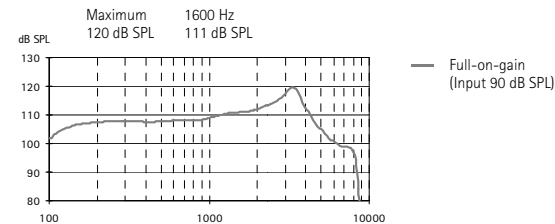

Acoustic gain

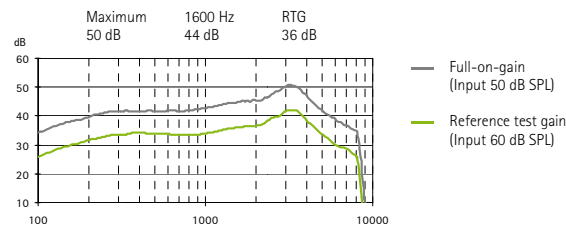

| | | | |
|------------------------------|-------------------|---------|---------|
| Frequency range | <100 Hz - 8200 Hz | | |
| Total harmonic distortion | 500 Hz | 800 Hz | 1600 Hz |
| | 2.5% | 2.5% | 2% |
| | Battery current | | |
| Battery current | Quiescent | Working | |
| | 1.1 mA | 1.2 mA | |
| Equivalent input noise level | 19 dB SPL | | |

Dynamic data


| Compression | Attack time | Recovery time |
|-------------|-------------|---------------|
| | 10 ms | 50 ms |

Note: Using pure tone measurements with a digital hearing instrument can result in a wavy frequency response. This is an artifact resulting from the use of a narrowband input signal and does not effect the actual performance with naturally occurring broadband input signals.


2cm³ coupler data

ANSI S3.22-2003

Output sound pressure level

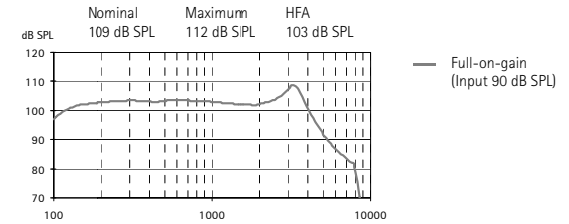

Acoustic gain

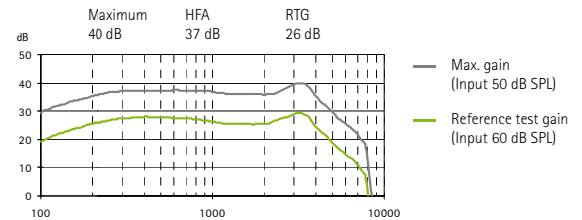


| | | | |
|------------------------------|-------------------|---------|---------|
| Frequency range | <100 Hz - 7900 Hz | | |
| Total harmonic distortion | 500 Hz | 800 Hz | 1600 Hz |
| | 1.5% | 1.5% | 1% |
| | Battery current | | |
| Battery current | Quiescent | Working | |
| | 1.1 mA | 1.2 mA | |
| Equivalent input noise level | 19 dB SPL | | |

Dynamic data

| Compression | Attack time | Recovery time |
|-------------|-------------|---------------|
| | 10 ms | 50 ms |

Input / Output characteristics at 2000 Hz

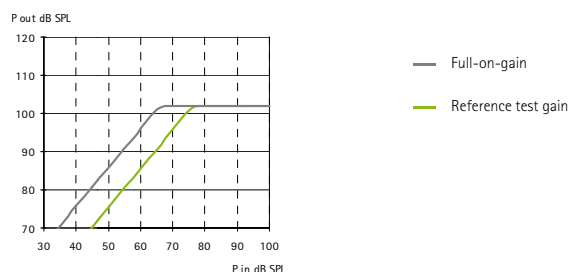

PHONAK


Technical Data

Phonak Dalia 10 Petite (P)


Ear simulator data

EN / IEC 60118 and IEC 60711

Output sound pressure level

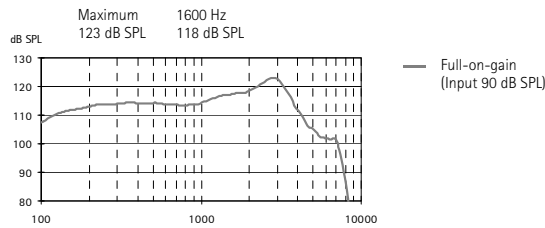

Acoustic gain

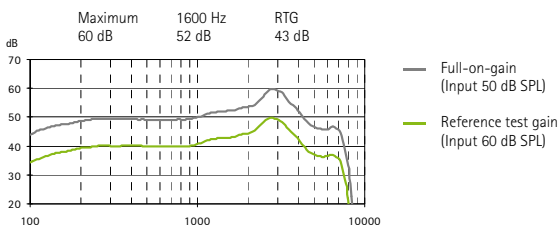

| | | | |
|------------------------------|-------------------|---------|---------|
| Frequency range | <100 Hz - 7500 Hz | | |
| Total harmonic distortion | 500 Hz | 800 Hz | 1600 Hz |
| | 2.5% | 2.5% | 2% |
| Battery current | Quiescent | Working | |
| | 1.1 mA | 1.2 mA | |
| Equivalent input noise level | 19 dB SPL | | |


Dynamic data

| | | |
|-------------|-------------|---------------|
| Compression | Attack time | Recovery time |
| | 10 ms | 50 ms |


2cm³ coupler data

ANSI S3.22-2003

Output sound pressure level

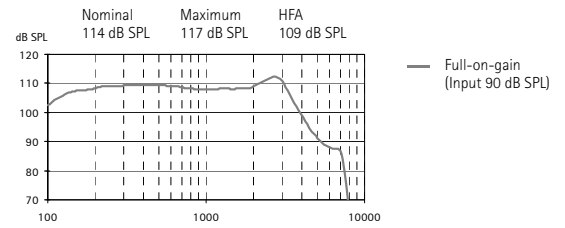

Acoustic gain

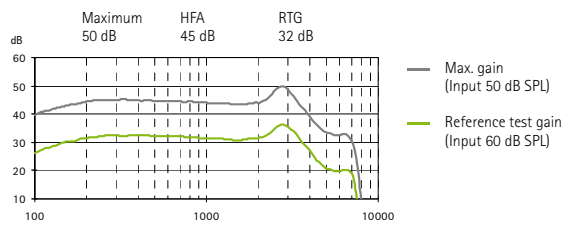


| | | | |
|------------------------------|-------------------|---------|---------|
| Frequency range | <100 Hz - 7200 Hz | | |
| Total harmonic distortion | 500 Hz | 800 Hz | 1600 Hz |
| | 1.5% | 1.5% | 1.5% |
| Battery current | Quiescent | Working | |
| | 1.1 mA | 1.2 mA | |
| Equivalent input noise level | 19 dB SPL | | |

Dynamic data

| | | |
|-------------|-------------|---------------|
| Compression | Attack time | Recovery time |
| | 10 ms | 50 ms |

Input / Output characteristics at 2000 Hz

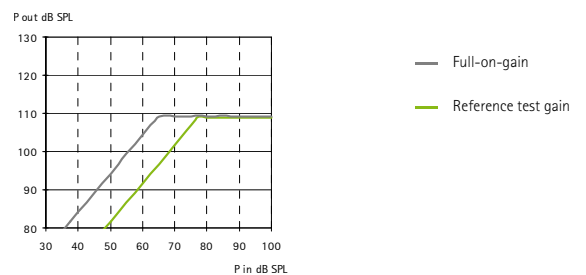

PHONAK

Technical Data


Phonak Dalia 10 Petite (SP)

(available in specific countries only)


Ear simulator data

EN / IEC 60118 and IEC 60711

Output sound pressure level

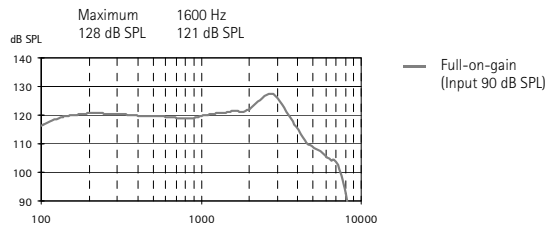

Acoustic gain

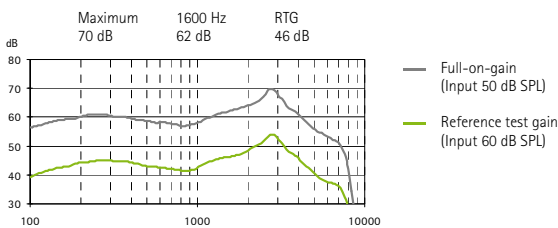

| | | | |
|------------------------------|--------------------|---------|---------|
| Frequency range | < 100 Hz - 7500 Hz | | |
| Total harmonic distortion | 500 Hz | 800 Hz | 1600 Hz |
| | 1.5% | 1.5% | 1% |
| Battery current | Quiescent | Working | |
| | 1.1 mA | 1.2 mA | |
| Equivalent input noise level | 19 dB SPL | | |


Dynamic data

| | | |
|-------------|-------------|---------------|
| Compression | Attack time | Recovery time |
| | 10 ms | 50 ms |


2cm³ coupler data

ANSI S3.22-2003

Output sound pressure level

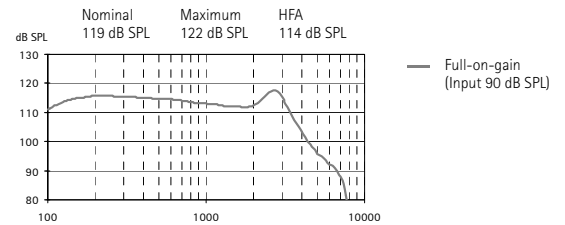

Acoustic gain

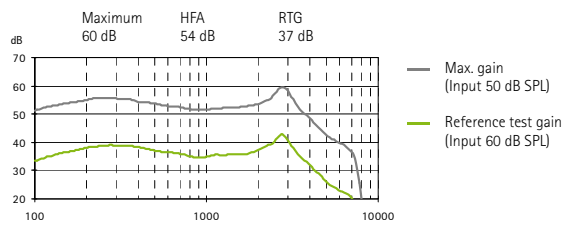


| | | | |
|------------------------------|--------------------|---------|---------|
| Frequency range | < 100 Hz - 7200 Hz | | |
| Total harmonic distortion | 500 Hz | 800 Hz | 1600 Hz |
| | 1% | 1% | 1% |
| Battery current | Quiescent | Working | |
| | 1.1 mA | 1.2 mA | |
| Equivalent input noise level | 19 dB SPL | | |

Dynamic data

| | | |
|-------------|-------------|---------------|
| Compression | Attack time | Recovery time |
| | 10 ms | 50 ms |

Input / Output characteristics at 2000 Hz

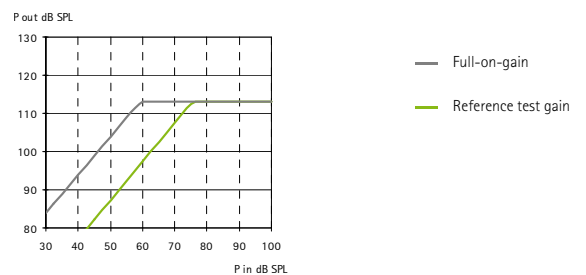

PHONAK