

## OK! Plus M


### Technical Data



### Ear simulator data

EN / IEC 60118 and IEC 60711

#### Output sound pressure level

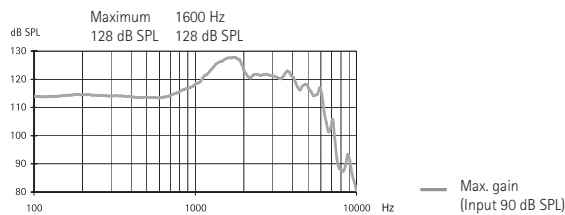


Compact moderate power BTE, battery size 13 and omnidirectional microphone.

Unless otherwise specified, all data obtained are measured with the hook type HE7.


Note: Using pure tone measurements with a digital hearing instrument can result in a wavy frequency response. This is an artifact resulting from the use of a narrowband input signal and does not reflect the actual performance with naturally occurring broadband input signals.

#### Acoustic gain

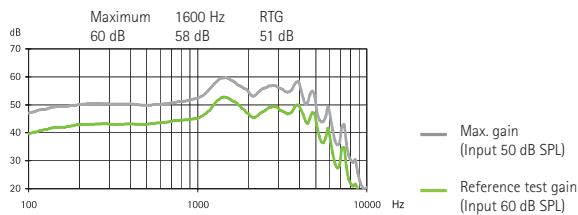

Frequency range	<100 Hz – 6200 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	3.0%	2.0%	2.0%
Battery current	Quiescent	Working	
	1.1 mA	1.2 mA	
Equivalent input noise level	20 dB SPL		

#### Induction coil sensitivity

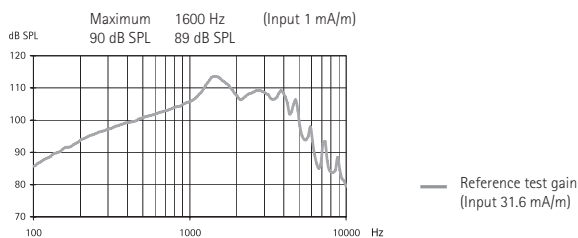

#### Dynamic data


Compression	Attack time	Recovery time
	1 ms	20 ms




## 2cm<sup>3</sup> coupler data

ANSI S3.22-2003


### Output sound pressure level

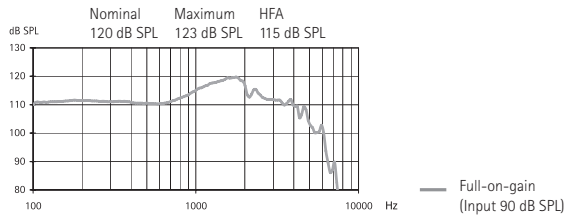

### Input / Output characteristics at 2000 Hz

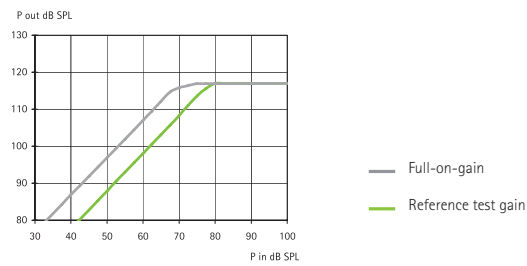


### Acoustic gain

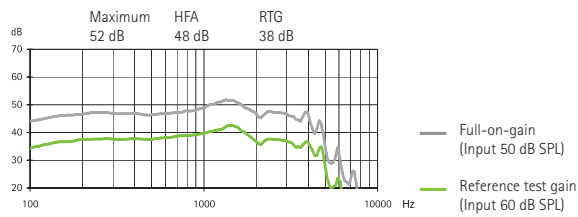

Frequency range	<100 Hz – 6200 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	3.0%	2.0%	2.0%
Equivalent input noise level	21 dB SPL		

### Induction coil sensitivity

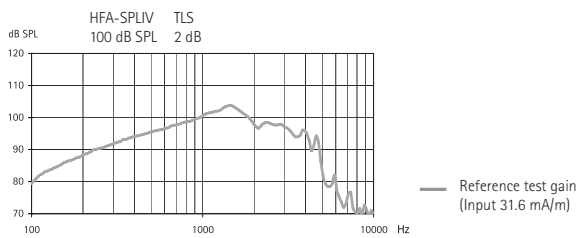

### Dynamic data

Compression	Attack time	Recovery time
	1 ms	30 ms