



Small, mild/moderate gain BTE with battery size 13 and digital SurroundZoom

Ear simulator data

EN / IEC 60118 and IEC 60711


Output sound pressure level

(Input 90 dB SPL)

Maximum 1600 Hz
131 dB SPL 129 dB SPL

Frequency response

— Max. gain
(Input 90 dB SPL)

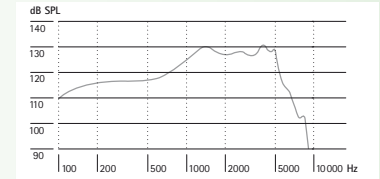


Acoustic gain

(Input 50 dB SPL)

Maximum 1600 Hz RTG (FOG - 7 dB)
58 dB 57 dB 50 dB

Frequency response

— Max. gain
(Input 50 dB SPL)
— Reference test gain
(Input 60 dB SPL)
(FOG - 7 dB)

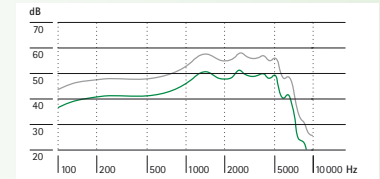

Frequency range (DIN 45605) <100 – 7000 Hz

Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	2.0%	1.0%	1.0%

Battery current	Quiescent	Working
	1.0 mA	1.1 mA

Equivalent input noise level 19 dB SPL


Induction coil sensitivity

(Input 1 mA/m)

Maximum 1600 Hz
89 dB SPL 88 dB SPL

Frequency response

— Reference test gain
(Input 31.6 mA/m)

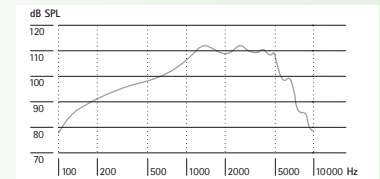

Dynamic data

Compression	Attack time	Recovery time
	1 ms	10 ms

Unless otherwise specified, all data obtained are measured with the hook type HE7 680 and in linear measurement setting

Note: Measurements with pure tones of a digital hearing instrument can result in a wavy frequency response. This is an artifact resulting from the use of a very narrowband input signal and does not reflect the actual performance with naturally occurring broadband input signals.

Measurements were taken in August 2006 and are subject to change without notice.

Savia Art™ 211 dSZ

2 cm³ coupler data

ANSI S3.22-1996


Output sound pressure level

(Input 90 dB SPL)

Maximum	HFA
125 dB SPL < 128 dB SPL	120 dB SPL

Frequency response


— Full-on-gain
(Input 90 dB SPL)

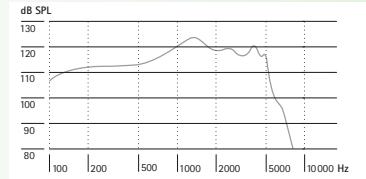

2 cm³ coupler data

Input / Output characteristics at 2000 Hz

— Full-on-gain
— Reference test gain

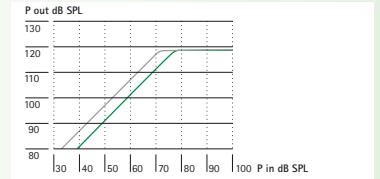


Acoustic gain

(Input 50 dB SPL)

Maximum	HFA	RTG
53 dB	49 dB	43 dB

Frequency response

— Full-on-gain
(Input 50 dB SPL)
— Reference test gain
(Input 60 dB SPL)

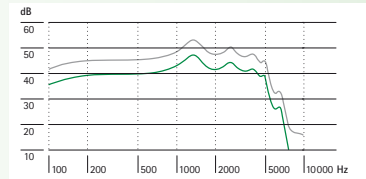

Frequency range < 100 – 6800 Hz

Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	2.0% < 5.0%	1.0% < 4.0%	1.0% < 4.0%

Battery current	Quiescent	Working
	1.0 mA	1.1 mA < 1.3 mA

Equivalent input noise level 19 dB SPL < 22 dB SPL


Induction coil sensitivity

(Input 31.6 mA/m)

HFA – SPLIV	TLS
103 dB SPL	0 dB

Frequency response

— Reference test gain
(Input 31.6 mA/m)

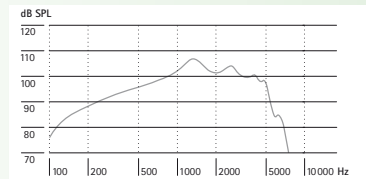

Dynamic data

Compression	Attack time	Recovery time
	1 ms	10 ms