



Compact moderate power BTE, battery size 13 and AudioZoom (for fitting range, product details, and available options, please see "Una Technical Product overview" or visit www.phonak.com/professional)

Unless otherwise specified, all data obtained are measured with the hook type HE7 680 and in iPFG measurement settings.

Note: Measurements with pure tones of a digital hearing instrument can result in a wavy frequency response. This is an artifact resulting from the use of a narrowband input signal and does not reflect the actual performance with naturally occurring broadband input signals.


Ear simulator data

EN / IEC 60118 and IEC 60711

Output sound pressure level

Maximum 1600 Hz
131 dB SPL 129 dB SPL


— Full-on gain
(Input 90 dB SPL)

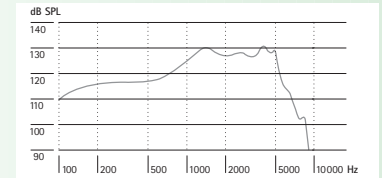

Acoustic gain

Maximum 1600 Hz RTG (FOG - 7 dB)
58 dB 57 dB 50 dB

— Full-on gain
(Input 50 dB SPL)
— Reference test gain
(Input 60 dB SPL)

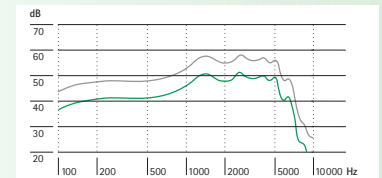

Frequency range <100 Hz – 7000 Hz

Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	2%	1%	1%


Battery current	Quiescent	Working
	0.8 mA	0.9 mA

Equivalent input noise level 19 dB SPL

Induction coil sensitivity

Maximum 1600 Hz (Input 1 mA/m)
89 dB SPL 88 dB SPL

— Reference test gain
(Input 31.6 mA/m)

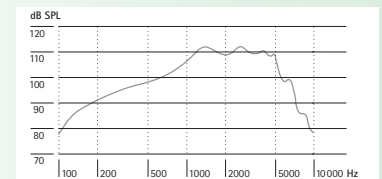

Dynamic data

Compression	Attack time	Recovery time
	1 ms	10 ms

Una™ M AZ


2 cm³ coupler data

ANSI S3.22-1996

Output sound pressure level

Nominal	Maximum	HFA
125 dB SPL	128 dB SPL	120 dB SPL


— Full-on gain
(Input 90 dB SPL)

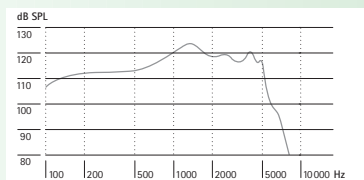

2 cm³ coupler data

Input / Output characteristics at 2000 Hz


— Full-on gain
— Reference test gain

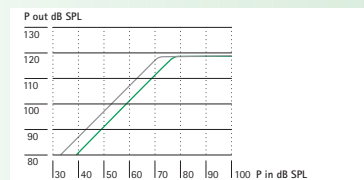

Acoustic gain

Maximum	HFA	RTG
53 dB	49 dB	43 dB

— Full-on gain
(Input 50 dB SPL)
— Reference test gain
(Input 60 dB SPL)

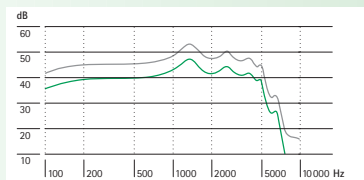


Frequency range	<100Hz – 6800 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	2 %	1 %	1 %
Battery current	Quiescent	Working	
	0.8 mA	0.9 mA	
Equivalent input noise level	19 dB SPL		

Induction coil sensitivity

HFA – SPLIV	TLS
103 dB SPL	0 dB

— Reference test gain
(Input 31.6 mA/m)

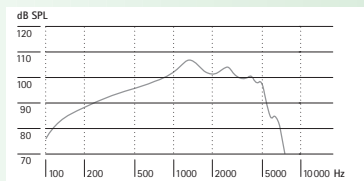

Dynamic data

Compression	Attack time	Recovery time
	1 ms	10 ms