

## inspiro for Classic FM

### Technical Data




#### inspiro features

- Classic FM
- Durable
- Easy and intuitive user interface
- Multi-frequency
- Fast charging capabilities
- iLapel microphone
- Two wearing options: clip and lavalier
- Fully programmable with FM SuccessWare 4.4 or higher

#### iLapel features

- Directional miniature microphone
- No switching required
- Easy to clip

**inspiro for Classic FM** is a FM transmitter ideally suited to the needs of teachers. Suitable for use in regular schools as well as special schools for hearing impaired pupils. The outstanding design, with its large color display, makes this transmitter unique. Soft keys, housing options to suit different types of clothing, and a wealth of other details reflect our passion for userfriendliness. **inspiro** – designed for schools that care about their children.

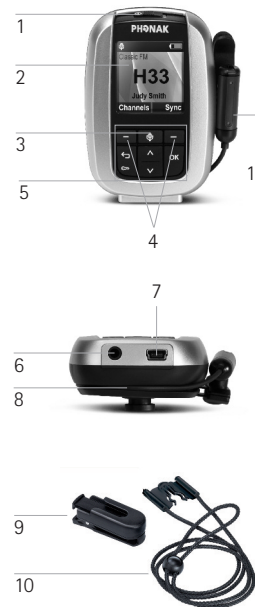

#### Product description

- 1 On/Off switch
- 2 High resolution matrix color LCD
- 3 Microphone mute key
- 4 Soft keys
- 5 Menu navigation
  - Up/Down
  - Escape
  - OK
- 6 3.5 mm Audio input socket
- 7 mini-USB socket for charging and programming
- 8 Microphone cable wrapper
- 9 Clip
- 10 Lavalier
- 11 iLapel microphone

#### Relevant internet pages

Your online comprehensive FM support tool for schools  
[www.eSchoolDesk.com](http://www.eSchoolDesk.com)

Latest set-up tips for FM systems in combination with hearing instruments and Cochlear implants.  
[www.phonak.com/FM\\_Configurator](http://www.phonak.com/FM_Configurator)

Your online FM knowledge base  
[www.FMELibrary.com](http://www.FMELibrary.com)

Your online FM counseling support tool  
[www.FMCounselWare.com](http://www.FMCounselWare.com)

# inspiro for Classic FM

## General data

Type:	Classic FM transmitter
Length:	83 mm
Width:	56 mm
Height:	24 mm
Weight:	69 g
Operating temperature range:	-10°C to +60°C
Humidity:	20% to 75%

## HF characteristics

Frequency switching:	Integrated digital frequency synthesizer, max. 32 programmable channels
Frequency stability:	Better than +/- 1 kHz
Modulation:	FM (narrow band)
Antenna:	Integrated in the microphone cable
Operating range:	15 to 30 m
Spurious emissions (EMC):	< -54 dBm ERP (EN 300.422)
Signal to noise ratio*:	>45dB( $\Delta f > 4\text{kHz}$ )

## Audio characteristics

Audio bandwidth:	100 - 6000 Hz
Microphone sensitivity:	97 dB SPL at $f_{\text{mod}} = 1\text{ kHz}$ for $f_{\text{dev}} = 4.0\text{ kHz}$ (100% modulation) 70 dB SPL at $f_{\text{mod}} = 1\text{ kHz}$ for $f_{\text{dev}} = 3.0\text{ kHz}$
Distortion:	THD < 0.2 % at 70 dB SPL with $f_{\text{mod}} = 1\text{ kHz}$ $f_{\text{dev}} = 3.0\text{ kHz}$

## Battery

Type:	Lithium Polymer
Dimensions:	Length: 52 mm Width: 25.8 mm Height: 9.5 mm
Voltage:	3.7 V
Capacity:	1000 mAh
Operating time:	12 hours
Charging temperature range:	0°C to +45°C
Charging time with charger:	100% in 2 hours 80% in 1 hour

## Power supply

Type:	Dedicated <b>inspiro</b> charger
Connector:	mini-USB Type B

## Standards

Radiocom:	EN 300.422-1,-2:2001 EN 300.330-1,-2:2006 EN 300.328:2006 CFR 47, part 95, part 15C
EMC:	EN 301.489-3, -9, 17:2002
El. Safety:	EN 60950-1:2006

## Accessories and replacement parts

iLapel microphone	Cinch adapter for audio cable
mini-USB charger	Replacement battery
mini-USB/USB cable for programming	Replacement clip
Audio cable 1 m / 3 feet	Replacement lavalier
Audio cable 3 m / 10 feet	Replacement alligator clip for iLapel
Scart adapter for audio cable	