



Phonak Bolero™ M

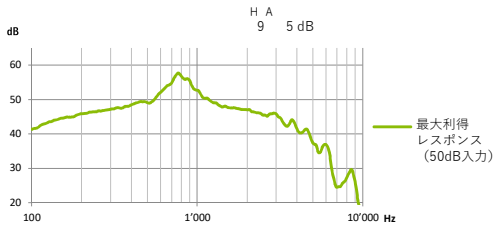


ス H
2 cm³

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

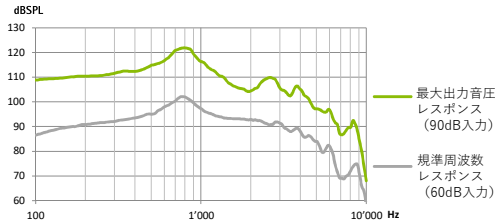


100 8000 Hz	
500Hz	800Hz 1600Hz
1.5 + 3%以下	1.5 + 3%以下 2.0 + 3%以下
2.16 mA以下	
19 + 3 dB 以下	

入力の レ

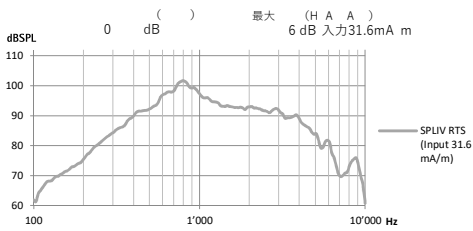


HE11 680
2 cm³

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

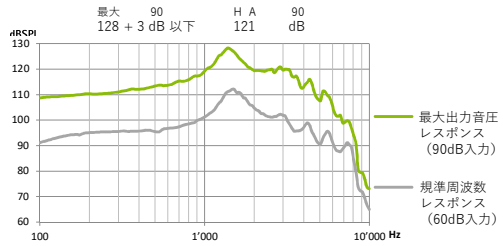


最大音 利得

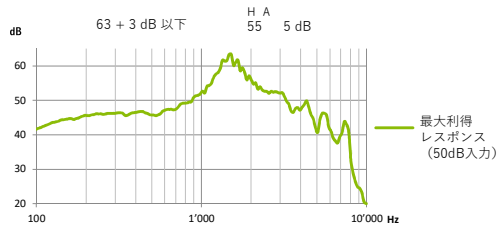

100 8000 Hz		
500Hz	800Hz	1600Hz
5.0 + 3%以下	3.0 + 3%以下	2.0 + 3%以下
2.16 mA以下		
19 + 3 dB 以下		

入力の レ

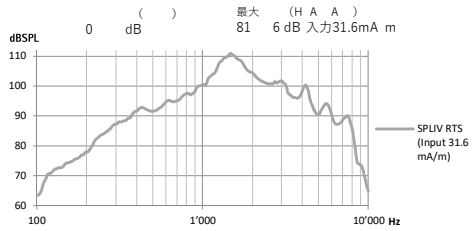

A Sonova brand

PHONAK
life is on