# Phonak Target 7.0

# Phonak Remote Support Fitting Guide

Phonak Remote Support is designed to support the client's fitting by providing hearing aid care from a distance. If the client needs adjustments to their compatible Phonak hearing aid settings, this can be done in real time, in their own environment rather than traveling to the clinic.

This guide provides a detailed introduction to conduct a follow up Phonak Target fitting session using Phonak Remote Support.

For additional details on programming and fitting Phonak hearing aids, refer to the Phonak Target Fitting Guide.

### Contents

Requirements	2
Setting up for Phonak Remote Support	
Invite client to a Phonak Remote Support fitting session	
Start the video call with Phonak Remote Support	6
Start the follow-up session with Phonak Remote Support	8
Save the adjustments to the hearing aids	9
End video call	9
Information and description of symbols and system requirements	9



# Requirements

- Phonak Target fitting software version 6.2 or higher installed.
- Advanced PhonakPro account activated with Remote Support.
   Note: Only applicable in certain countries.
- An initial hearing aid fitting must be performed in the clinic.

**Note:** To activate Remote Support in compatible hearing aids for an existing client, the hearing aids must be connected to Phonak Target in the clinic. Upon saving the session, Remote Support is activated. This is only applicable in certain countries where the invite process is not applicable.

- Computer with an integrated webcam or microphone or an external webcam and microphone connected to the computer. **Note:** For better sound quality, use headphones with a microphone connection.
- Stable internet connection (Wi-Fi, LAN or 4G) with at least 5 Mbit/s of data transfer connection for uploads and downloads. Internet connection can be checked within Phonak Target.

Note: Clients using 4G may incur additional charges for data usage depending upon their contract.

# Setting up for Phonak Remote Support

When starting a Phonak Remote Support session for the first time on a computer, run the Remote Support connection test: [Setup] > [Internet] > [Online services] > [Test Remote Support connection]. Once completed, the status will be shown.



Select client for Remote Support. If there is more than one clinic site available, select the clinic where the remote session will take place.

Click on [PhonakPro login] to log into PhonakPro or to create a new PhonakPro account.

Note: A PhonakPro account is only applicable in certain countries.





When connected to your PhonakPro account, you can send a Phonak Remote Support invitation to your client. Click on the [Invite] button. The invitation includes the link for the client to download the myPhonak app which is required for the Phonak Remote Support session.

Q			territy from at	Target, Phonak and and	
Clere#	Latinare Taget	Fed name Provide		eSolutions	(benefit)
				Enhouse and a model summary Section 3 and a constant Marcados Constantes Constantes Constantes	C Chert or gar instell         Media,           Image: constraint of the state of the stat
					Continue face sealer + Report

**Note:** The Remote Support invitation process is only applicable in certain countries. In countries where the invite process is not applicable, follow these steps:


- An initial hearing aid fitting must be performed in the clinic. Upon clicking [Save & close session], Remote Support is enabled.
- To activate Remote Support in compatible hearing aids for an existing client, the hearing aids must be connected to Phonak Target in the clinic. Upon saving the session, remote fitting is activated.
- The client must download the myPhonak app onto their smartphone and pair the hearing aids to the app before a Remote Support session can take place. Once this has been completed, client status will be updated in Phonak Target.
- The 'Manage client' ( 🔯 ) icon allows you to manage the client's status by viewing the phone pairing status or removing the client from Remote Support.

Share Latrant Fortune - annos Inean An SI elektron	۹			Stevens, Alex' courses	
remont have an ST declary Otherspace Technologies (Marine State Marine (Marine State State State State State State State St		And sense			
Manage (dest Statis to the de los not not "Instantion" © fearch game (Maximum)	· accore	been .	A44 81	elokoors	
Manago Anne Sadaga mitan ka kan mita ang Panasanan Qi Ananta pana				S Paired to gittere	(Seet to to be against
State service on the "Instation" ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■				10 M	
30de entre la che ne sul l'autosani ⊘ feuera pare (bial soul			Manage client		0
Phenet to phone Direk Menu			Since and an inclusion and section.	and the second se	
f annua					
					1 amounts
			Aerox.		(A. SCHOOL ST.
Review client from integer Review.			Remote class from involve suggest	Arrest	
(bec				Over	


# Invite client to a Phonak Remote Support fitting session

**Note:** The following steps relating to the Phonak Remote Support invitation process and creating a myPhonak account are only applicable to certain countries.

Enter the client's email address and follow the steps to sending an invitation to your client.









Once the invitation has been sent, you can manage the client's status and see when he/she is ready to start the Phonak Remote Support session.

In the [Manage invitation] tab you can:

- Re-invite the client.
- Remove the client relationship.
- Provide client instructions to the client.


Once the client has set up a myPhonak account and has completed the myPhonak app setup, the client status will be updated.

Click [Close] to exit the [Manage eSolutions] screen.

Client invitations are stored on the computer used to send them. If you use a different computer than the one used to send the invitation to the client, the invitation information can be retrieved by clicking on [Retrieve invitation].

lient & session	
levens Alex	
auteendgesluces	
OAH audiogram	
0	
- 00200 - 002000	
	Pro tetting darla availatar
Solutions	A New Miling areaser
Client has no bearing ach selected and no invitation is stored. Retrieve its	ADDRESS OF ADDRES





# Start the video call with Phonak Remote Support

At the time of the appointment, click on [Start Remote Support].

You and your client will be connected to the video call. You may have to wait for the client to enter the Phonak Remote Support session with the myPhonak app.

Once connected, you will see and hear your client. Make sure the video and microphone on your computer is enabled.


**Note:** Switching between an integrated or external microphone or webcam can be performed before or during a session by clicking on the settings wheel which is located at the top right hand corner of the remote support screen.

As soon as the client enters the Remote Support session and has accepted the camera and microphone requests on their smartphone, both videos are displayed on the screen.


Now you can begin the follow up session.



#### Screen overview of PhonakTarget

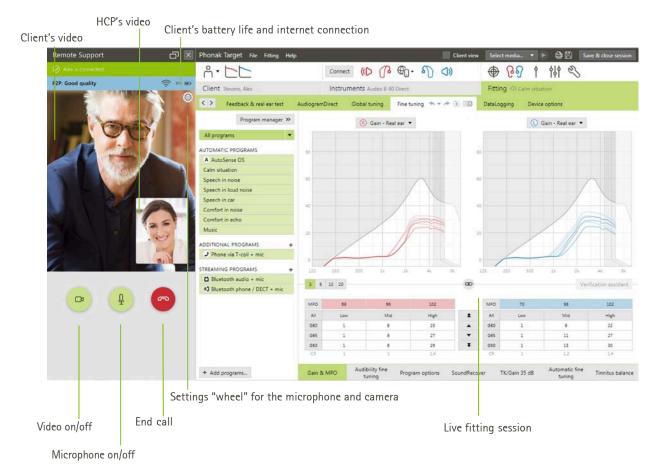

#### Screen overview of the client's smartphone

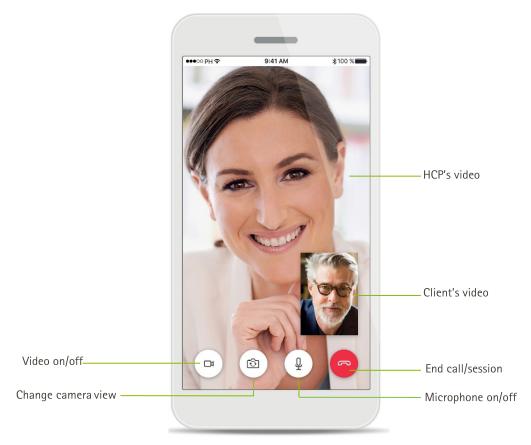

# Start the follow up session with Phonak Remote Support

It is recommended that the client has new batteries in their hearing aids or sufficient charge in their rechargeable hearing aids before connecting to the Remote Support session.

Click on [Open fitting session] to open the client's fitting session in Phonak Target.

Inform the client that you are going to connect to the hearing aids.

- Click on [Connect] to connect to the hearing aids.
- The hearing aids will be temporarily muted.
- Once hearing aids are connected, use Phonak Target as you typically would in a follow-up session.
- The ticon is visible when you have established connection with the client's hearing aids.
- The hearing aids are live and any adjustments you make are sent to the hearing aids in real-time.

#### Note:

- Feedback & real ear test cannot be measured during a Phonak Remote Support session.
- The MPO cannot be increased.
- It is not possible to end Phonak Remote Support with the client until the fitting session in Phonak Target has been saved and closed.
- In the event that the connection between the client's hearing aids and Phonak Target gets interrupted during an active Remote Support session, the hearing aids will reboot and keep the last valid fitting.





# Save the adjustments to the hearing aids

After fitting, click on [Save & close session] to save the fitting into the hearing aids and Phonak Target.

Inform the client that the hearing aids will be temporarily muted.

Remote support	đΡX										98				
Alex Stevens is connected		ふ・しし		Connect	(D) (]	•	no	(1)	۲	69 1	¢ļ¢	000	z	6	D
States.		Client Stevers, Ales	Close session						-						
		Patgrar	() Select the items t	0 1210											
Oney		All programs	Hearing aids									ar	*		
		AUTOMATIC PROGRAM A AutoSense OS	L: Audéo 890-Din									1			
		Calm situation Speech in noise	Accessories									-	-	1	1.5
	A	Speech in car Comfort in naise	No configurable acces	sory								-	-	1	175
6		Comfort in echo	✓ Database									- 1			
6		Masic	Remote support sess	ion.								10			
·		ADDITIONAL PROGRAM											2 58	82	80
Direct.		2 Music 1										2	* **	-	-
<b>#</b> 1		STREAMING PROGRAM								Save	Cancel	. 8	5 23 1 27		
		<ul> <li>TV Connector + m</li> <li>Bluetpath phone</li> </ul>	655	1 1 3	4 14 3	4 30 3		14 ¥	620 1	1 2	4 14	24 7	3 29	24	16
•	~														
		+ Add programs.	Gain	a MPO	Audibility fine tuning	Program	options	SoundRecor	er2 TR)	Gein 35 dB	Autom		lint	itus b	alen

# End video call

To end the Phonak Remote Support session, click on 🗢 to end the call.

Phonak Target will ask if you want to close the Phonak Remote Support session. Click [Yes] to confirm and disconnect from your client's smartphone.

Remote support dP X	PhonaicTarget He starway Hep		Beatings:
Alex Sevens is case acted	Clent 8 section		
CARGO.	Stevers Alex	Fitting session managements	
Remote support	NOAH aufopram		
() top vides call	60.28.29/8 60.28.29/8	Auto Ho Diver Se tablemin	
To you really want to also the sideo call?	eSolutions (Minister Volume)	A Oach asserty	
Yes Bu	Statement agent &		in fquit.
00		0 🔨 🕘 🥥 keen badi kalan bang	

# Information and description of symbols and system requirements

Information and the description of symbols and an overview of system requirements can be found in the Phonak Target Fitting Guide.

# Bluetooth

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Phonak is under license. Other trademarks and trade names are those of their respective owners.

Apple, the Apple logo, iPhone and iOS are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Android, Google Play and the Google Play logo are trademarks of Google Inc.

CE mark applied 2020



- Manufacturer: Sonova AG
- Sonova AG Laubisrütistrasse 28 CH-8712 Stäfa Switzerland

9

